



Platinum Temperature Sensors

4SW – Product Series

Temperature Range: –200°C...+400°C

Platinum temperature sensor elements with perpendicular wire connections

Advantage: Perfect for small contact surfaces

Technical Data

Specification:	DIN EN 60751	
Temperature range:	-200°C to +400°C	
Temperature Coefficient:	TCR = 3850 ppm/K	
Tolerance Classes:	F 0.1 (Class Y)	-50°C to +150°C
	F 0.15 (Class A)	-90°C to +300°C
	F 0.3 (Class B)	-200°C to +400°C
	F 0.6 (Class C)	-200°C to +400°C
	1/5 F 0.3 (Class K)	on request
	1/10 F 0.3 (Class K)	on request
Leads:	Silver wire (Ø = 0.25 mm) Recommended connection technology: Soldering, Welding	
Lead Lengths:	10 mm	
Long-term stability:	Max. Drift = Less than 0.03% after 1000h at max. operating temperature	
Note:	Other connection lengths and chip sizes on request	



INNOVATIVE SENSOR TECHNOLOGY


ISTAG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com

4SW – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +400^{\circ}\text{C}$

4W 232

Dimensions, LxW:	2.3 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000	
Self Heating (mK):	Water (v= 0 m/s)	$\Delta T_w = 2.5$ at 0°C
	Air (v= 0 m/s)	$\Delta T_a = 25$ at 0°C
Response Time (s):	Water (v= 0.4 m/s)	$T_{0.5} = 0.15$ $T_{0.63} = 0.2$ $T_{0.9} = 0.55$
	Air (v= 1 m/s)	$T_{0.5} = 4.5$ $T_{0.63} = 6$ $T_{0.9} = 12$
Measuring Current (mA):	100 Ω : 1	
	500 Ω : 0.5	
	1000 Ω : 0.3	

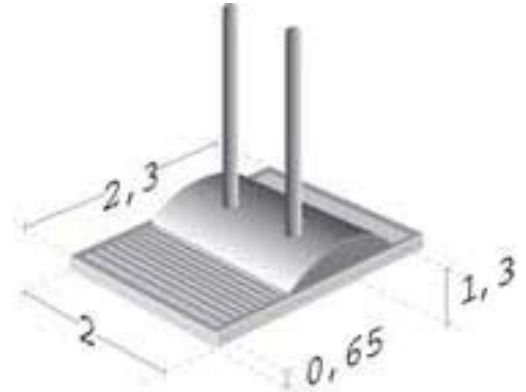

Order Example: **P** 1K0. 232. 4 SW. B. 010
 1 2 3 4 5 6 7

1. Material Identification = Platinum temperature sensor
2. Resistance Value in ohm = $1000\Omega / 0^{\circ}\text{C}$
3. Chip Dimension = 2.3×2.0 mm
4. Temperature Range = -200°C to $+400^{\circ}\text{C}$
5. Extension = Perpendicular leads
6. Tolerance Class = DIN EN 60751 F 0.3 (former Class B)
7. Connection length = 10 mm



INNOVATIVE SENSOR TECHNOLOGY