



Platinum Temperature Sensors

8W – Product Series

Temperature Range: –200°C...+850°C

Platinum temperature sensor elements with wire connections

Technical Data

Specification: DIN EN 60751

Temperature range: -200°C to +850°C

Temperature Coefficient: TCR = 3850 ppm/K

Tolerance Classes:	F 0.1 (Class Y)	-50°C to +150°C
	F 0.15 (Class A)	-90°C to +300°C
	F 0.3 (Class B)	-200°C to +850°C
	F 0.6 (Class C)	-200°C to +850°C
	1/5 F 0.3 (Class K)	on request
	1/10 F 0.3 (Class K)	on request

Leads: Platinum wire connection (Ø = 0.2 mm)
Recommended connection technology: Soldering, Welding, Crimping

Lead Lengths: 7 mm



INNOVATIVE SENSOR TECHNOLOGY


IST AG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com

8W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +850^{\circ}\text{C}$


8W 420

Dimensions, LxW:	4.0 x 2.0 mm
Nominal Resistance at 0°C (ohm):	200
Measuring Current (mA):	200 Ω : 0.8

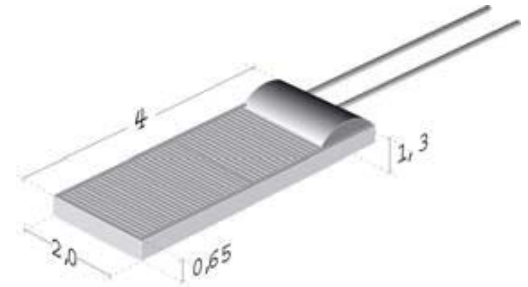

8W 516

Dimensions, LxW:	5.0 x 1.6 mm	
Nominal Resistance at 0°C (ohm):	100/1000	
Self Heating (mK):	Water ($v=0$ m/s) Air ($v=0$ m/s)	$\Delta T_w = 1.3$ at 0°C $\Delta T_a = 14$ at 0°C
Response Time (s):	Water ($v=0.4$ m/s) Air ($v=1$ m/s)	$T_{0.5} = 0.25$ $T_{0.63} = 0.3$ $T_{0.9} = 0.7$ $T_{0.5} = 5.5$ $T_{0.63} = 7.5$ $T_{0.9} = 16$
Measuring Current (mA):	100 Ω : 1 1000 Ω : 0.3	

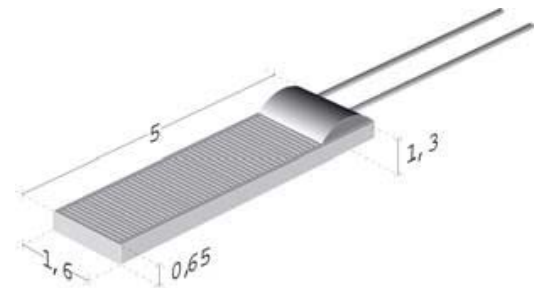

Order Example: **P** **1K0.** **516.** **8** **W.** **B.** **007**
 1 2 3 4 5 6 7

1. Material Identification = Platinum temperature sensor
2. Resistance Value in ohm = $1000\Omega / 0^{\circ}\text{C}$
3. Chip Dimension = 2.3×2.0 mm
4. Temperature Range = -200°C to $+850^{\circ}\text{C}$
5. Extension = Wire Connections
6. Tolerance Class = DIN EN 60751 F 0.3 (former Class B)
7. Connection length = 7 mm



INNOVATIVE SENSOR TECHNOLOGY